

WARNING & HAZARD

LED BEACON Class I

Permanent Mount, Vacuum Mount



▶▶ NOW AVAILABLE!

FEATURES & BENEFITS

- 12 different selectable flash patterns in either of two phases, plus steady-on
- Extremely low current draw; Circuit board is conformal coated to protect circuitry
- Durable polycarbonate twist on/off lens
- S-Link™ System* synchronizing capabilities with up to six other units (for hardware models only). Allows for synchronization with other S-Link compatible products
- Durable, lightweight polycarbonate base, flange 3-hole permanent mount, 1" pipe mount, vacuum magnet mount with cig. plug (on/off and pattern select switch)
- 5 year warranty

PERMANENT MOUNT

Voltage: 12 to 24 VDC


Amp Draw: 0.5 amps @ 12 VDC

VACUUM MAGNET

Voltage: 12 VDC

Amp Draw: 0.5 amps @ 12 VDC

APPROVALS: SAE J845 CLASS I ● AMBER ○ WHITE ● RED SAE J845 CLASS II ● BLUE **NOT SAE APPROVED** ● GREEN

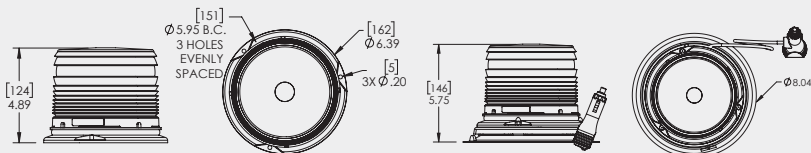

PART #	DESCRIPTION	MOUNT	COLOR
SHORT LENS			
78031	LED Beacon, Class I, Short Lens	Permanent	○ White
78041	LED Beacon, Class I, Short Lens	Vacuum Magnet	○ White
78033	LED Beacon, Class I, Short Lens	Permanent	● Amber
78043	LED Beacon, Class I, Short Lens	Vacuum Magnet	● Amber
78035	LED Beacon, Class II, Short Lens	Permanent	● Blue
78045	LED Beacon, Class II, Short Lens	Vacuum Magnet	● Blue
78034	LED Beacon, Short Lens	Permanent	● Green
78032	LED Beacon, Class I Short Lens	Permanent	● Red
78030	LED Beacon, Class I Short, Clear Lens	Permanent	● Amber
TALL LENS			
78051	LED Beacon, Class I, Tall Lens	Permanent	○ White
78053	LED Beacon, Class I, Tall Lens	Permanent	● Amber
78055	LED Beacon, Class II, Tall Lens	Permanent	● Blue
78054	LED Beacon, Tall Lens	Permanent	● Green
78052	LED Beacon, Class I, Tall Lens	Permanent	● Red
78050	LED Beacon, Class I, Tall, Clear Lens	Permanent	● Amber



S-Link is a Trademark of Star1889 Headlight & Lantern Co.

**FOR MORE INFORMATION VISIT
OUR WEBSITE AT GROTE.COM**
GROTE'S GOT IT!

***S-LINK TECHNOLOGY:** S-Link System is a proprietary technology that will allow similar S-Link products to be synchronized. This would allow for a user to define the flash patterns on multiple devices for a customized, tailored look on a vehicle. Note: Only S-Link compatible products can be synchronized together. Refer to user installation manuals for details on S-Link Synchronization.



230 Travail Rd, Markham,
Ontario, Canada L3S 3J1
Tel: 800.268.5612
US: 800.628.0809
www.grote.com

CONNECT & PROTECT

WARNING & HAZARD

LED BEACON Class I

Permanent Mount, Vacuum Mount

▶▶ NOW AVAILABLE!

FEATURES & BENEFITS

- 12 different selectable flash patterns in either of two phases, plus steady-on
- Extremely low current draw; Circuit board is conformal coated to protect circuitry
- Durable polycarbonate twist on/off lens
- S-Link™ System* synchronizing capabilities with up to six other units (for hardware models only). Allows for synchronization with other S-Link compatible products
- Durable, lightweight polycarbonate base, flange 3-hole permanent mount, 1" pipe mount, vacuum magnet mount with cig. plug (on/off and pattern select switch)
- 5 year warranty

PERMANENT MOUNT

Voltage: 12 to 24 VDC


Amp Draw: 0.5 amps @ 12 VDC

VACUUM MAGNET

Voltage: 12 VDC

Amp Draw: 0.5 amps @ 12 VDC

APPROVALS: SAE J845 CLASS I ● AMBER ○ WHITE ● RED SAE J845 CLASS II ● BLUE NOT SAE APPROVED ● GREEN

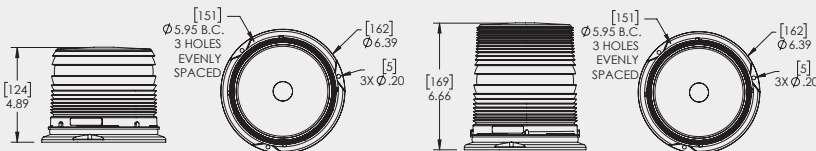

PART #	DESCRIPTION	MOUNT	COLOR
SERVICE PARTS			
98221	Replacement Short Lens		○ Clear
98223	Replacement Short Lens		● Amber
98225	Replacement Short Lens		● Blue
98224	Replacement Short Lens		● Green
98222	Replacement Short Lens		● Red
98171	Replacement Tall Lens		○ Clear
98173	Replacement Tall Lens		● Amber
98175	Replacement Tall Lens		● Blue
98174	Replacement Tall Lens		● Green
98172	Replacement Tall Lens		● Red
98470	Branch Guard (Low Profile)		
98460	Branch Guard (High Profile)		



S-Link is a Trademark of Star1889 Headlight & Lantern Co.

FOR MORE INFORMATION VISIT
OUR WEBSITE AT GROTE.COM
GROTE'S GOT IT!

***S-LINK TECHNOLOGY:** S-Link System is a proprietary technology that will allow similar S-Link products to be synchronized. This would allow for a user to define the flash patterns on multiple devices for a customized, tailored look on a vehicle. Note: Only S-Link compatible products can be synchronized together. Refer to user installation manuals for details on S-Link Synchronization.



230 Travail Rd, Markham,
Ontario, Canada L3S 3J1
Tel: 800.268.5612
US: 800.628.0809
www.grote.com

CONNECT & PROTECT