
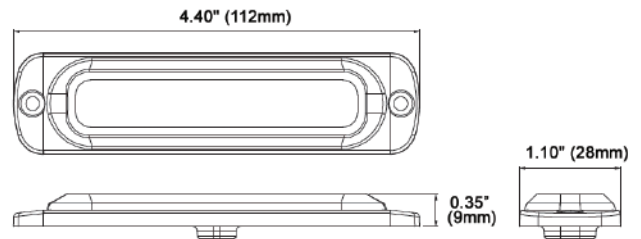


# LED MODULES

## FLAT6 SERIES

### Specifications:

- Voltage: 12-24VDC
- Light Source: 6 LEDs
- Output: 10W
- Current Draw: 0.50A @ 12VDC / 0.25A Max @ 24VDC
- Flash Patterns: 19
- Lens: Polycarbonate
- Mounting Base: Aluminum
- Mount: Surface
- Size: 4.40"L x 1.10"H x 0.35"D  
112mm x 9mm x 28mm
- Colors: 
- Warranty: 5 Years

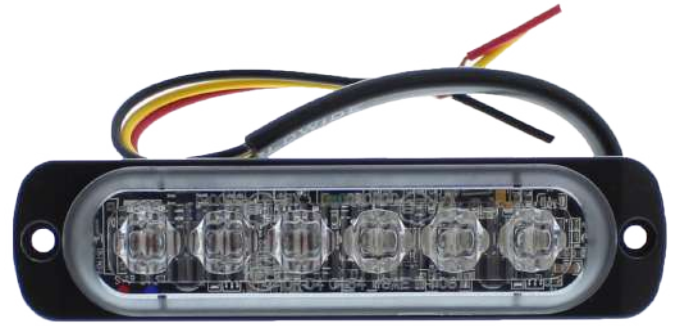

### Features:

- Super low profile for discreet mounting
- Multi-unit synchronization
- Simultaneous or alternate flashing
- Built-in selectable flash patterns
- Non-volatile memory recalls last flash pattern used at power up
- LEDs rated to 100,000 hours of operation
- Reverse polarity protected
- Weather & vibration resistant design for external or internal use

### Certifications:

- SAE J595 Class I
- ECE R10-04
- CA Title 13 (Amber, Blue, & Red Only)

### Replacement Parts and Accessories

	Color		Color
SYFLAT6-A	Amber	SYFLAT6-G	Green
SYFLAT6-AB	Amber/Blue	SYFLAT6-R	Red
SYFLAT6-AC	Amber/Clear	SYFLAT6-RB	Red/Blue
SYFLAT6-AG	Amber/Green	SYFLAT6-RC	Red/Clear
SYFLAT6-B	Blue	SYFLAT6V-A	Amber
SYFLAT6-BC	Blue/Clear	SYFLAT6V-AC	Amber/Clear
SYFLAT6-C	Clear		

	Description
SYFLAT6-BZ	Chrome Bezel
SYFLAT6-DS	Duel Stack L-bracket
SYFLAT6-FL	Black Flange
SYFLAT6-LB	Single L-bracket
SYFLAT6-SBS	Duel Head L-bracket



US: 16355 South Lone Elm Road • Olathe, KS 66062 • USA  
Canada: 75 Skyway Drive • Mississauga, ON L5W 0H2 • Canada

P: 913-780-1440 • TOLL FREE 800-447-3693  
E: info@superiorsignals.com • www.superiorsignals.com