

SYLEDS04 SERIES - LED MODULES

METEORLITE®

SYLEDS04 SERIES

Specifications:

- Mount: Flange, 2-hole
- Lens: Polycarbonate
- LEDs per head: 4
- Voltage: 12VDC
- Current Draw: .6AMP max
- Power Output: 7.7 Watt
- Flash Patterns: 19

Flash patterns:

- | | | |
|------------------|-----------------------|-------------------------|
| • Random | • Single-Quad (split) | • Ultra (all) |
| • Single (split) | • Single H/L (split) | • Single-Quad (all) |
| • Double (split) | • Single (all) | • Single H/L (all) |
| • Quad (split) | • Double (all) | • Steady 2 (California) |
| • Quint (split) | • Quad (all) | • Steady 4 (all) |
| • Mega (split) | • Quint (all) | |
| • Ultra (split) | • Mega (all) | |

*SPLIT=Head1 alternate Head2 *ALL=all LEDs on

- Warranty: 5 Year
- Features:
 - Multi-module synchronization
 - Simultaneous or alternate flashing
 - Built-in selectable flash patterns
 - Non-volatile memory recalls last flash pattern used at power up
 - LEDs rated to 100,000 hours of operation
 - Reverse polarity protection
 - Weatherproof & vibration resistant design
 - Interior and exterior use

• Colors: ● ○



Certifications:

- SAE J575, J845
- CA Title 13 (Amber Only)



Variations:

PART #	DESCRIPTION
SYLEDS04-A	12VDC, Amber LEDs
SYLEDS04-C	12VDC, Clear LEDs

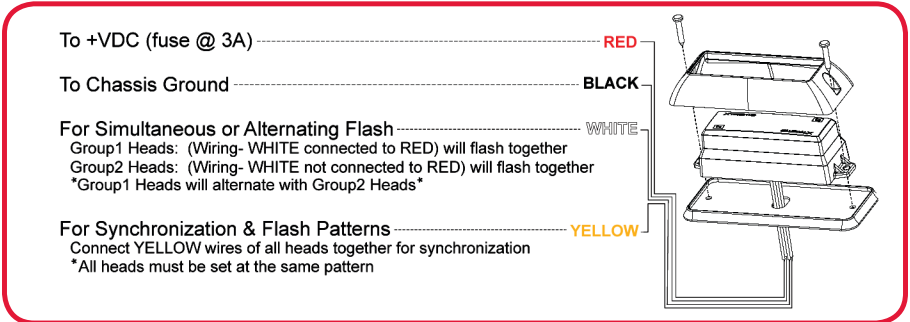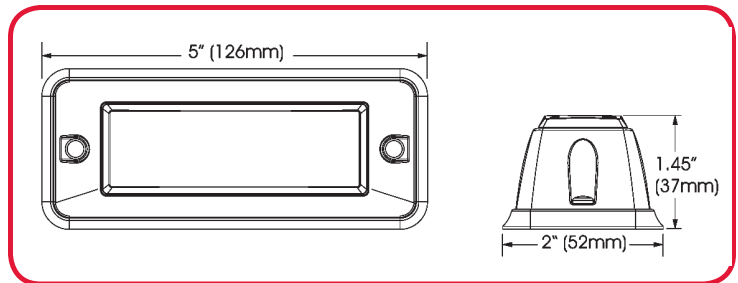

APPLICATIONS:



US: 16355 South Lone Elm Road • Olathe, KS 66062 • USA
 Canada: 1039 Cardiff Blvd. • Mississauga, Ontario L5S 1P4 • Canada

P: 913-780-1440 • TOLL FREE 800-447-3693 • F: 913-780-1427
 E: info@superiorsignals.com • www.superiorsignals.com