

TAILGATE TRAFFIC ADVISOR

TGTA SERIES

Specifications:

- Voltage: 12-24VDC
- Light Source: 72 LEDs
- Current Draw: 1.30A @ 12V max
5A @ 24V max
- Flash Patterns: 15
- Lens: Silicone
- Housing: Polycarbonate
- Mounting: 3M adhesive tape
- Wire Harness Length: 157.50" (4001mm)
- Controller Wire Leads Length: 13.70" (348mm)
- Size: 48.00"L x 0.50"W x 0.25"H
- Color: ●
- Warranty: 1 Year



Features:

- Operating temperatures range between -22°F and 221°F (-30°C and +105°C)
- Super low profile
- LEDs rated at 100,000 hours
- Non-volatile memory recalls last flash pattern used at power up
- Reverse polarity protected

Certifications:

- IP67
- CE


| FLASH PATTERN # | TRAFFIC ARROW PATTERNS |
|-----------------|--|
| 1 | Single flash - full strip |
| 2 | Double flash - full strip |
| 3 | Triple flash - full strip |
| 4 | Quad flash - full strip |
| 5 | Single flash - left/right alternating |
| 6 | Double flash - left/right alternating |
| 7 | Triple flash - left/right alternating |
| 8 | Quad flash - left/right alternating |
| 9 | Directional right to left full strip |
| 10 | Directional left to right full strip |
| 11 | Directional from center to left - left side only |
| 12 | Directional from center to right - right side only |
| 13 | Directional from center to both ends - full strip |
| 14 | Directional from both ends to center - full strip |
| 15 | Running flash |

| PART # | DESCRIPTION |
|------------|---------------------------------|
| SYTGTA48-A | 48" Traffic advisor strip light |

Wire Set Up

| COLOR | FUNCTION |
|--------|---------------|
| Red | Power |
| Black | Ground |
| Yellow | Flash pattern |

*Disassembling lamp or cutting wires voids the warranty

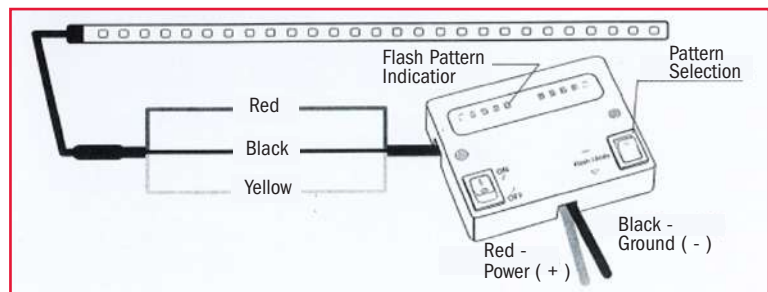

APPLICATIONS:



US: 16355 South Lone Elm Road • Olathe, KS 66062 • USA
Canada: 75 Skyway Drive • Mississauga, ON L5W 0H2 • Canada

P: 913-780-1440 • TOLL FREE 800-447-3693
E: info@superiorsignals.com • www.superiorsignals.com