



REVISION HISTORY		
REV.	DESCRIPTION	DATE
01	PRELIMINARY RELEASE PER EB0011	2023-10-25
A	INITIAL RELEASE PER EB0011	2023-10-30

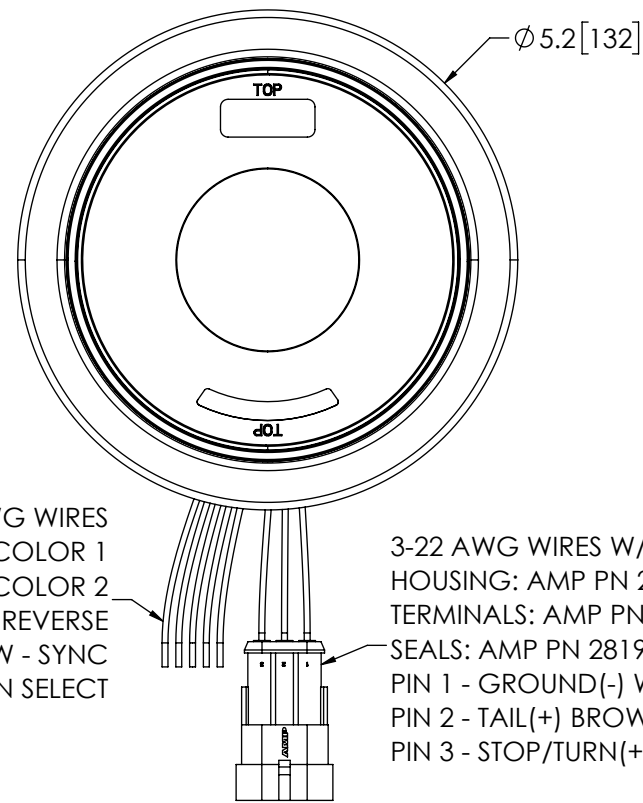


FRONT VIEW W/ GROMMET

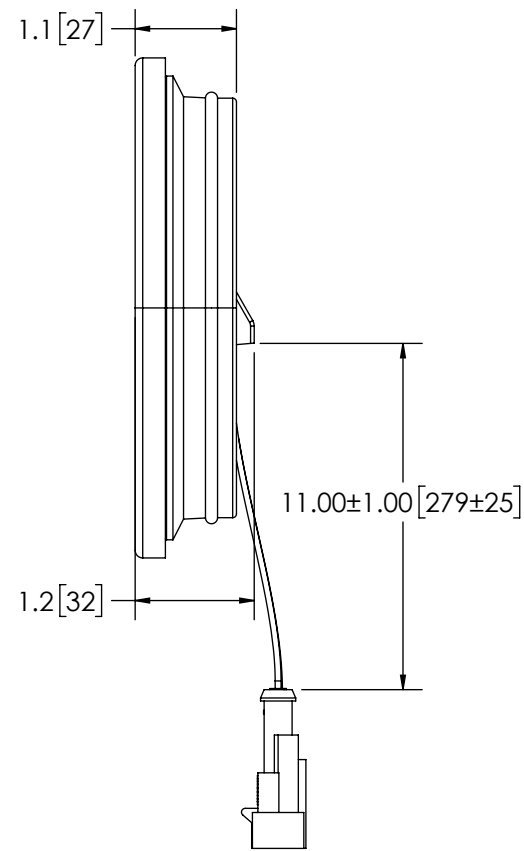


SIDE VIEW W/ GROMMET

5-22 AWG WIRES
 RED(+) - POWER, COLOR 1
 WHITE(+) - POWER, COLOR 2
 GRAY(+) - REVERSE
 YELLOW - SYNC
 BLUE(-) - FLASH PATTERN SELECT

3-22 AWG WIRES W/ CONNECTOR
 HOUSING: AMP PN 282105-1
 TERMINALS: AMP PN 282109-1
 SEALS: AMP PN 281934-2
 PIN 1 - GROUND(-) WHITE W/ BLACK STRIPE
 PIN 2 - TAIL(+) BROWN
 PIN 3 - STOP/TURN(+) RED W/ WHITE STRIPE

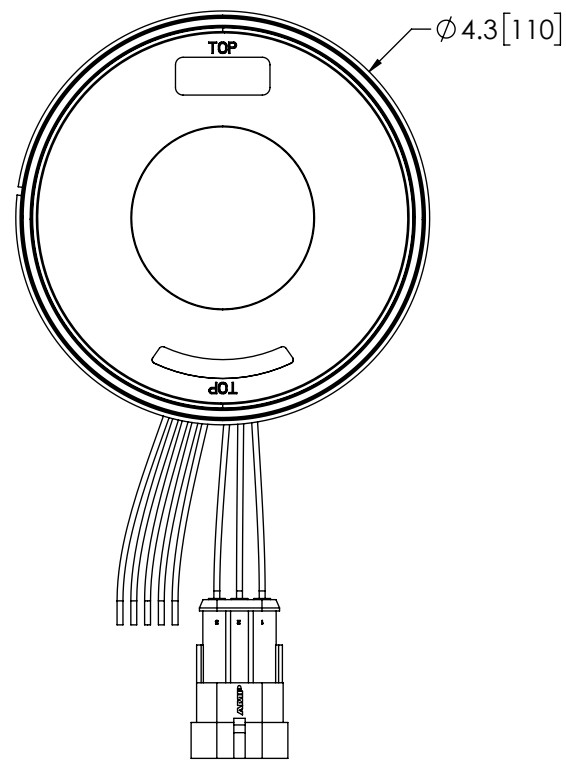

FRONT VIEW

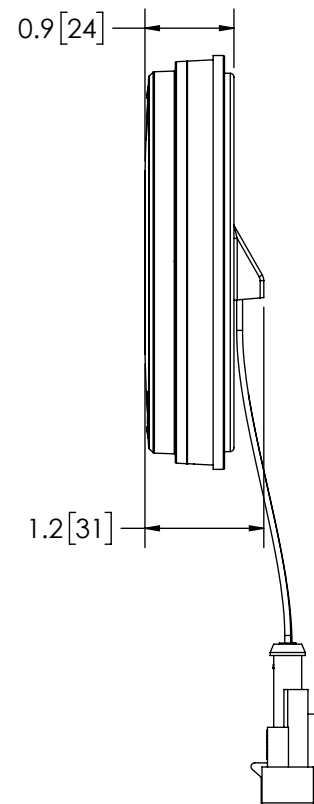

SIDE VIEW

SPECIFICATIONS

- CERTIFICATIONS: ECE R10; SAE J595 CLASS 1 AMBER/WHITE; CA Title 13 CLASS B AMBER; IP67/IP69K; DOT ISTRW-1
 Note: Unique components, accessories, and hardware kits are not typically included in the Product Certification Test Protocols. Unless otherwise specified, the Product Certifications referred to herein are predicated upon the base product model configuration.
- FLASH MODE: SINGLE: 75 ± 5 FLASHES PER MINUTE
 SINGLE: 375 ± 5 FLASHES PER MINUTE
 DOUBLE: 75 ± 5 FLASHES PER MINUTE
- VOLTAGE (NOMINAL): 12 - 24VDC
- VOLTAGE (EXTREME): 9 - 32VDC
- CURRENT (PEAK): 1.1A (@12VDC NOMINAL)
- POWER (NOMINAL): 14.1W (@12VDC NOMINAL)
- TEMPERATURE RANGE: -40°F(-40°C) TO 149°F(65°C)
- CONNECTION: 5-22 AWG WIRES
 3-22 AWG WIRES W/ CONNECTOR
- MOUNTING: GROMMET
- BASE MATERIAL: POLYCARBONATE
- LENS MATERIAL: POLYCARBONATE
- PRODUCT WEIGHT: 0.5LBS (0.23Kg)

FGS. PRODUCT CHART	
FGS. NO.	COLOR
ED3040AB-AMP3S	AMB/BLU
ED3040AG-AMP3S	AMB/GRN
ED3040AW-AMP3S	AMB/WHT

- NOTES:
 1. ROHS COMPLIANT
 2. DIMENSIONS IN INCHES[MILLIMETERS (FOR REFERENCE)]

PROPRIETARY AND CONFIDENTIAL INFORMATION

THIS DRAWING AND THE DESIGN AND OTHER INFORMATION DISCLOSED HEREIN ARE THE PROPERTY OF ELECTRONIC CONTROLS COMPANY AND/OR ITS ECCO SAFETY GROUP AFFILIATES ("ECCO") AND IS ISSUED IN CONFIDENCE TO RECIPIENT FOR ENGINEERING INFORMATION PURPOSES ONLY. THIS DRAWING AND THE DESIGN AND OTHER INFORMATION DISCLOSED HEREIN MAY NOT BE USED, COPIED, REPRODUCED OR OTHERWISE DISCLOSED IN PART OR IN WHOLE TO THIRD PARTIES OR USED FOR ANY OTHER PURPOSE WITHOUT PRIOR ECCO WRITTEN CONSENT. ECCO RESERVES ALL PATENT, COPYRIGHT, TRADEMARK AND OTHER PROPRIETARY RIGHTS TO THIS DOCUMENT, INCLUDING ALL DESIGN, MANUFACTURING, REPRODUCTION, USE AND SALES RIGHTS THEREIN. THIS DRAWING IS SUBJECT TO RECALL BY ECCO AT ANY TIME, AND YOUR POSSESSION AND/OR USE CONSTITUTES ACCEPTANCE OF THESE TERMS. ©2023 ELECTRONIC CONTROLS COMPANY

SCALE 1:2		APPROVALS	DATE
CAD GENERATED DRAWING DO NOT MANUALLY UPDATE.		DRAWN BY BTK	2023-10-25
TOLERANCES ARE IN INCHES, AND MILLIMETERS TOLERANCES UNLESS OTHERWISE STATED ARE:		CHECKED ABD	2023-10-26
MILLIMETERS DECIMALS	INCHES DECIMALS	MECH. ENG.	
XX. ± 1.0mm	X.X ± 0.1	ELEC. ENG. SPO	2023-10-25
XX.X ± 0.5mm	X.XX ± 0.04	TEST ENG. JRT	2023-10-27
	X.XXX ± 0.02	SALES.	
THIRD ANGLE PROJECTION			
Electronically Controlled Use Latest Copy			

ECCO ® www.eccolink.com Americas (800) 635-5900 Europe +44 (0)113 237 5340 Asia Pacific +61 (0)3 63322444		DIRECTIONAL, 4" ROUND, STR-W COMBO, AMP	
		CUSTOMER PART NO. SEE CHART	
SIZE: B	DWG. NO. ED3040XX-AMP3S	REV. A	
SHEET 1 OF 1		Project: EB0011	Date Created: 2023-10-25