



REVISION HISTORY		
REV.	DESCRIPTION	DATE
03	REVISED PER EL0220	2021-03-01
04	REVISED PER EL0220	2021-03-03
A	INITIAL RELEASE PER EL0220	2021-03-09

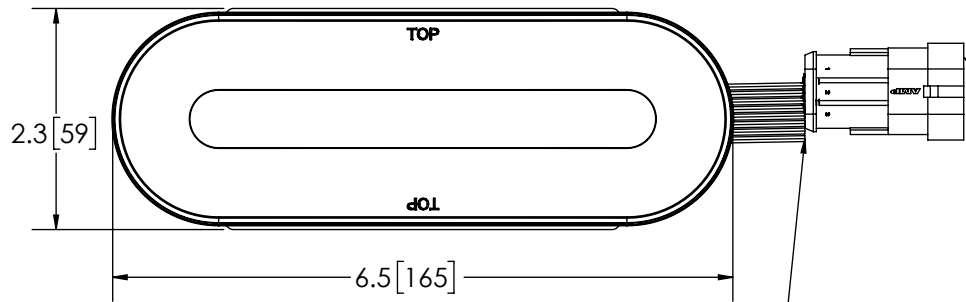

3-18 AWG WIRES W/ CONNECTOR
 HOUSING: AMP PN 282105-1
 TERMINALS: AMP PN 282109-1
 SEALS: AMP PN 281934-2
 PIN 1 - GROUND(-) WHITE W/ BLACK STRIPE
 PIN 2 - TAIL(+) BROWN
 PIN 3 - STOP/TURN(+) RED W/ WHITE STRIPE


5-18 AWG WIRES STRIPPED & TINNED
 RED(+) - POWER, COLOR 1
 WHITE(+) - POWER, COLOR 2
 GRAY(+) - REVERSE
 YELLOW - SYNC
 BLUE(-) - FLASH PATTERN SELECT

1.0 [26]
W/ GROMMET
 1.2 [31]
W/ GROMMET

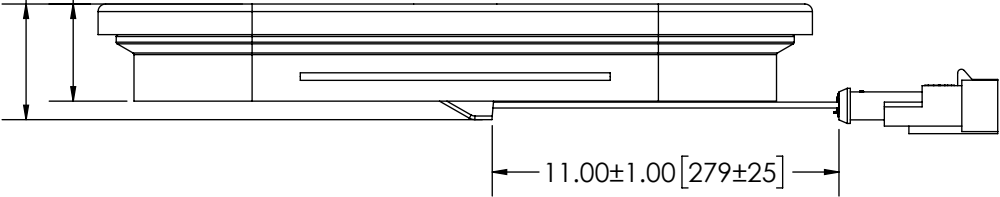

SPECIFICATIONS

- CERTIFICATIONS: ECE R10; SAE J595 CLASS 1 AMBER/WHITE; CA Title 13 CLASS B AMBER; IP67/IP69K; RoHS, DOT ISTRW-1
 Note: Unique components, accessories, and hardware kits are not typically included in the Product Certification Test Protocols. Unless otherwise Specified, the Product Certifications referred to herein are predicated upon the base product model configuration.
- FLASH MODE: Single : 75 ± 5 FLASHES PER MINUTE
 Single : 375 ± 5 FLASHES PER MINUTE
 Double : 75 ± 5 FLASHES PER MINUTE
- VOLTAGE (NOMINAL): 12-24 VDC
- VOLTAGE (EXTREME): 9-32 VDC
- CURRENT (PEAK): 1.4A (@ 12 VDC NOMINAL)
- POWER (MAXIMUM): 17.9W (@ 12 VDC NOMINAL)
- TEMPERATURE RANGE: -40°F (-40°C) TO 149°F (65°C)
- CONNECTION: 5 - 18 AWG WIRES + 3 - 18 AWG WIRES W/CONNECTOR
- MOUNTING: GROMMET
- BASE MATERIAL: POLYCARBONATE
- LENS MATERIAL: POLYCARBONATE
- PRODUCT WEIGHT: 0.5 LBS (0.23 Kg)



NOTES:
 1. ROHS COMPLIANT
 2. DIMENSIONS IN INCHES[MILLIMETERS (FOR REFERENCE)]

SCALE 1:2		APPROVALS	DATE
CAD GENERATED DRAWING DO NOT MANUALLY UPDATE. MODEL REFERENCED: 01		DRAWN BY JDT	2021-03-03
		CHECKED BTK	2021-03-04
TOLERANCES ARE IN INCHES, AND MILLIMETERS TOLERANCES UNLESS OTHERWISE STATED ARE:		MECH. ENG. JLA	2021-03-04
		ELEC. ENG. SPO	2021-03-04
MILLIMETERS DECIMALS XX. ± 1.0mm XX.X ± 0.5mm		TEST ENG. JRT	2021-03-09
INCHES DECIMALS X.X ± 0.1 X.XX ± 0.04 X.XXX ± 0.02		SALES.	
ANGLES ± 0.5°			
FRACTIONS ± 1/64			
THIRD ANGLE PROJECTION			

DIRECTIONAL, 6" OVAL, STR-W COMBO, AMP, AW

CUSTOMER PART NO. ED3060AW-AMP3S			
SIZE: A	DWG. NO. ED3060AW-AMP3S	REV. A	
Electronically Controlled Use Latest Copy		SHEET 1 OF 1	Project: EL0220 Date Created: 2021-02-05

PROPRIETARY AND CONFIDENTIAL INFORMATION
 THIS DRAWING AND THE DESIGN AND OTHER INFORMATION DISCLOSED HEREIN ARE THE PROPERTY OF ELECTRONIC CONTROLS COMPANY AND/OR ITS ECCO SAFETY GROUP AFFILIATES ("ECCO") AND IS ISSUED IN CONFIDENCE TO RECIPIENT FOR ENGINEERING INFORMATION PURPOSES ONLY. THIS DRAWING AND THE DESIGN AND OTHER INFORMATION DISCLOSED HEREIN MAY NOT BE USED, COPIED, REPRODUCED OR OTHERWISE DISCLOSED IN PART OR IN WHOLE TO THIRD PARTIES OR USED FOR ANY OTHER PURPOSE WITHOUT PRIOR ECCO WRITTEN CONSENT. ECCO RESERVES ALL PATENT, COPYRIGHT, TRADEMARK AND OTHER PROPRIETARY RIGHTS TO THIS DOCUMENT, INCLUDING ALL DESIGN, MANUFACTURING, REPRODUCTION, USE AND SALES RIGHTS THERE TO. THIS DRAWING IS SUBJECT TO RECALL BY ECCO AT ANY TIME, AND YOUR POSSESSION AND/OR USE CONSTITUTES ACCEPTANCE OF THESE TERMS. ©2021 ELECTRONIC CONTROLS COMPANY