

REVISION HISTORY						
REV.	DESCRIPTION	DATE				
03	REVISED PER EL0204	2020-11-25				
04	REVISED PER EL0204	2020-12-08				
Α	INITIAL RELEASE PER EL0204	2020-12-09				

2-18AWG CONDUCTOR CABLE RED - POSITIVE(+)

**RIGHT VIEW** 


BLACK - NEGATIVE (-)

## **SPECIFICATIONS**

1. CERTIFICATIONS: **(€**: ECE R10: △ : IP67 ROHS

Note: Unique components, accessories, and hardware kits are not typically Included in the Product Certification Test Protocols. Unless otherwise Specified, the Product Certifications referred to herein are predicated upon the base product model configuration.

- 2. RAW LUMENS: 1700 lumens
- 3. EFFECTIVE LUMENS: 1600 lumens
- 4. ILLUMINANCE (@100 FT): 0.6 lux
- 5. PEAK BEAM INTENSITY: 622 candela
- 6. VOLTAGE (NOMINAL): 12-24 VDC
- 7. VOLTAGE (EXTREME): 9-32 VDC
- 8. CURRENT (PEAK): 1.5A (@ 12 VDC NOMINAL)
- 9. POWER (MAXIMUM): 18.0W (@ 12 VDC NOMINAL)
- 10. TEMPERATURE RANGE: -40°F (-40°C) TO 149°F (65°C)
- 11. CONNECTION: 2-18 AWG CABLE
- 12. MOUNTING: M6X20 HARDWARE
- 13. HOUSING MATERIAL: ALUMINUM
- 14. LENS MATERIAL: POLYCARBONATE
- 15. PRODUCT WEIGHT: 0.9 LBS (0.41 Kg)

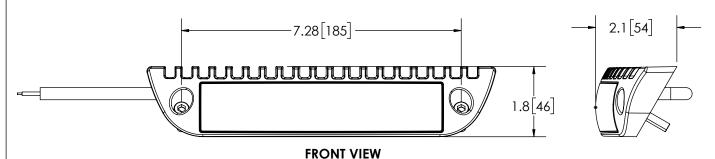

MOUNTING DISCLAIMER
MOUNTING MEASUREMENT IS FOR REFERENCE ONLY.
MEASURE BEFORE DRILLING.

## DISCLAIMER

DIMENSIONS, ILLUSTRATIONS, SPECIFICATIONS AND CERTIFICATIONS CONTAINED IN THIS DOCUMENT ARE TYPICAL OF THE ACTUAL PRODUCT AND ARE SUBJECT TO CHANGE. ECCO ENGINEERING DOES NOT MAINTAIN FORMAL DESIGN CONTROL OF THIS PRODUCT.

## **NOTES:**

- 1. MOUNTING GASKET NOT SHOWN
- 2. ROHS COMPLIANT
- 3. DIMENSIONS IN INCHES[MILLIMETERS (FOR REFERENCE)]

PROPRIETARY AND CONFIDENTIAL INFORMATION

THIS DRAWING AND THE DESIGN AND OTHER INFORMATION DISCLOSED HEREIN ARE THE PROPERTY OF ELECTRONIC CONTROLS COMPANY AND/OR ITS ECCO SAFETY (600P AFFILIATES ("ECCO") AND IS SISUED IN CONTROLNICE OF RECIPIENT FOR INGINEERING INFORMATION PURPOSES ONLY. THIS DRAWING AND THE DESIGN AND OTHER INFORMATION DISCLOSED HEREIN MAY NOT BE LISED, COPIED, REPRODUCED OR OTHERWISE DISCLOSED IN PART OR IN WHOLE TO THIS PARTIES OR LISED FOR ANY OTHER PURPOSE WITHOUT PROPERCY OWNITHIN CONSENT. ECCO RESERVES ALL PATIENT, COPIEIGHT, TRADEMARK AND OTHER PROPRIETARY NIGHTS TO HIS DOCUMENT, INCLIDING SALD ESIGN, MANUFACTURING, REPRODUCTION, USE AND SALES RIGHTS THERETO. THIS DRAWING IS SUBJECT TO RECALL BY ECCO AT ANY TIME, AND FOUR POSSESSION AND/OR USE CONSTITUTES ACCEPTANCE OF THESE TERMS, 1922 DELECTRONIC CONTROLS COMPANY.

	SCALE 1:2.5			APP	ROVALS	DATE					
CAD GENERATED DRAWING DO NOT MANUALLY UPDATE. MODEL REFERENCED: 01			DRAWN BY	AWN BY ABB 2020-12-08			<b>ECCO</b> ° www.eccolink.com				
			CHECKED	ART	2020-12-08						
	TOLERANCES ARE IN INCHES, AND MILLIMETERS TOLERANCES UNLESS OTHERWISE STATED ARE:		MECH. ENG.	JLA	2020-12-08	Americas (800) 635-5900   Europe +44 (0)113 237 5340   Asia Pacific +61 (0)3 63322444					
Ī	MILLIMETERS DECIMALS	INCHES DECIMALS	ANGLES ± 0.5°	ELEC. ENG.			WORK	LAMP	,18LED,FLOO	D,ANGLE,12-24V	,WHT
4	XX. ± 1.0mm XX.X ± 0.5mm	X.X ± 0.1 X.XX ± 0.04 X.XXX ± 0.02	FRACTIONS	TEST ENG.	WH	2020-12-08	CUSTOMER PAR				
╁	THIE	X.XXX ± 0.02 ± 1/64  THIRD ANGLE PROJECTION		SALES.	ARS	2020-12-08	EW2602-W				
	(In the state of t					SIZE: A	DWG. 1	NO. EV	V2602-W	REV.	
			Electronically Controlled Use Latest Copy		SHEET 1 OF 1	Project: E	EL0204	Date Created: 2020-11-17	A		