


Weather Pack Terminals

Packard 280 Series

Locking Connectors seal out moisture, dust, and dirt. These one-to six-contact nylon connectors are rated from -40°F to 257°F, and up to 16 volts DC and 20 amps. Terminals and seals are secured in the connector body with a hinge lock assembly. The tower half self-lubricating silicone body seal reduces engagement assembly force. Silicone cable seals must be used with the tin plated brass terminals. Use the cavity plug to fill any unused pin locations.

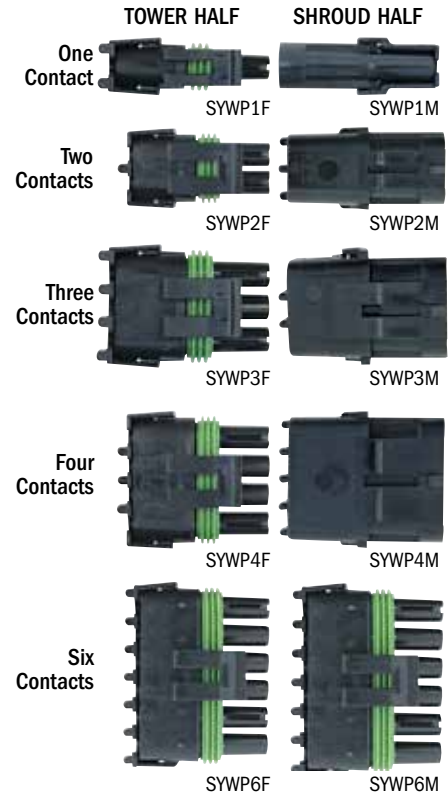

CABLE SEALS AND PLUGS

PART #	WIRE RANGE
SYWP22245	22 - 24
SYWP20185	20 - 18
SYWP16145	16 - 14
SYWP125	12
SYWP-PLUG	N/A

MALE TERMINALS

USE WITH SHROUD HALF

PART #	WIRE RANGE
SYWP222YM	22 - 24
SYWP2018M	20 - 18
SYWP1614M	16 - 14
SYWP12M	12

FEMALE TERMINALS

USE WITH TOWER HALF

PART #	WIRE RANGE
SYWP2224F	22 - 24
SYWP2018F	20 - 18
SYWP1614F	16 - 14
SYWP12F	12

Preassembled Weather Pack Pigtails

12" overall length.

One Contact		Two Contact		Three Contact		Four Contact		Six Contact	
PART #	AWG	PART #	AWG	PART #	AWG	PART #	AWG	PART #	AWG
SYWP18-1	18	SYWP18-2	18	SYWP18-3	18	SYWP18-4	18	SYWP18-6	18
SYWP16-1	16	SYWP16-2	16	SYWP16-3	16	SYWP16-4	16	SYWP16-6	16
SYWP14-1	14	SYWP14-2	14	SYWP14-3	14	SYWP14-4	14	SYWP14-6	14
SYWP12-1	12	SYWP12-2	12	SYWP12-3	12	SYWP12-4	12	SYWP12-6	12

Weather Pack Tools

Crimp Tool

crimps 20 to 14 gauge terminals and seals in one operation. Ratchet assembly assures a perfect crimp.

PART # SYWP402



Economy Crimp Tool

crimps 20 to 12 gauges in two steps, one for terminal and one for seal.

PART # SYWP-CRIMP



Pin Extraction Tool

removes male or female Weather Pack terminals.

PART # SYWP-EXTRACT

